


PRODUCT NO. 5123

CASAMBI phase cut dimmer 150W

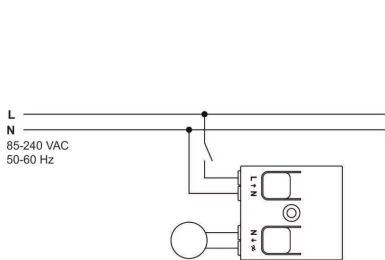

to the product page

LED dimmer for convenient operation of luminaires via CASAMBI app using phase cut-off signal (max. 150W).
controls the brightness of incandescent lamps, dimmable LED lamps and control gear for LEDs and halogen lamps (not for magnetic transformers)
suitable for retrofitting of phase cut-off dimmable luminaires (group control)
compatible with sensor (art. no. 5117), radio remote control (art. no. 5120) and wall switch (art. no. 5121)

Complete control via CASAMBI app:
Configuration of luminaires and luminaire networks
creation of scenes and animations (color gradients)
intelligent timer and gallery functions

SUCCESSION ARTICLE	-	PROTECTION CLASS (IP)	IP20
WEIGHT IN KG	0.02	INPUT VOLTAGE	100 - 240 V AC
POWER CONSUMPTION IN WATTS	max. 100	INPUT VOLTAGE SPAN	85-240 V AC
		INPUT VOLTAGE RANGE LUMINAIRE	85-240 V AC
		ETIM GRUPPEN-ID	EC002924
		BEG FUNDING	Only relevant in Germany

Dimensions

width: 37mm

height: 14mm

length: 41mm