Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: DOTLUX

Supplier's address: DOTLUX GmbH, Richard-Stuecklen-Strasse 7, 91781 Weissenburg, DE

Model identifier: 6037-040120

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Other electric interface		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	870 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height: 900 Width: 20 Depth: 17	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,381 0,373
Parameters for directional light sources:				
Peak luminous intensity (cd)		286	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value		92	Survival factor	0,90
the lumen maintenance factor		0,96		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

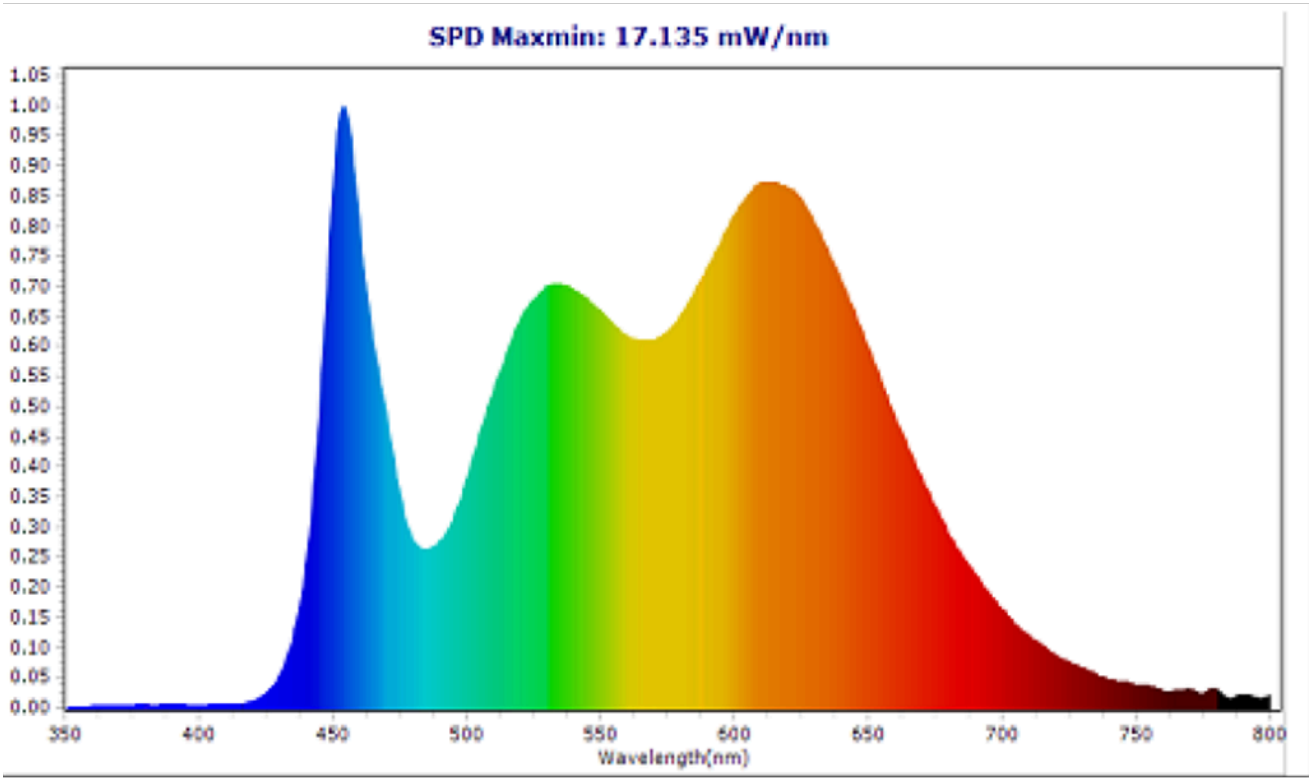
SPD Maxmin: 17.135 mW/nm
1.05
1.00
0.95
0.90
0.85
0.80
0.75
0.70
0.65
0.60
0.55
0.50
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
350
400
450
500
550
600
650
700
750
800
Wavelength(nm)

EPREL registration number: 1589214 Model placed on the Union market from 31/12/2023.	https://eprel.ec.europa.eu/qr/1589214

Supplier: DOTLUX GmbH (Manufacturer) **Website:** www.dotlux.de

Customer care service:

Name: DOTLUX GmbH **Website:** www.dotlux.com

Email: info@dotlux.de **Phone:** 09141/4051-0

Address:
Richard-Stuecklen-Strasse 7
91781 Weissenburg
Germany