

PRODUCT NO. 1938-455180


## DOTLUX LED tube LUMENPLUS 150cm 22W 5500K frosted rotating end cap



to the product page



- **TECHNICAL ADVANTAGES**
  - Internal aluminum heat sink enables optimized thermal management
  - Polycarbonate cover with UV-protective coating (non-yellowing)
  - Future-oriented due to individually replaceable power supply units
  - Individually adjustable light beam angle due to patented end cap
  - Fail-safe, as each individual LED is controlled separately
- **FURTHER ADVANTAGES OF LUMENplus TUBES**
  - 5 years Dotlux warranty on driver and LEDs
  - Easy replacement of fluorescent tubes with starters
  - Immediately the full, optimal light output after switching on
  - LM80 certified LEDs
  - This tube is VDE certified
  - Version suitable for central battery on request

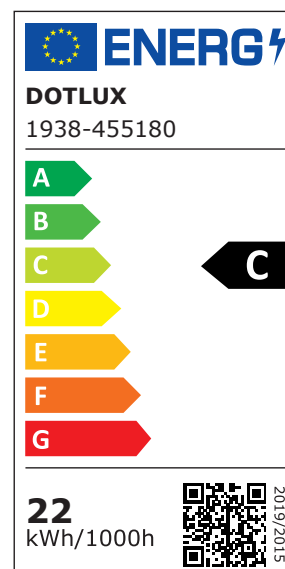

<b>SUCCESSION ARTICLE</b>	-	<b>BEAM ANGLE</b>	180°
<b>PREDECESSOR ARTICLE</b>	1938-355180 1938-155180 1938-1654-1	<b>PROTECTION CLASS (IP)</b>	IP20
<b>WEIGHT IN KG</b>	0.31	<b>SERVICE LIFE</b>	approx. 50.000 h at 25°C
<b>POWER CONSUMPTION IN WATTS</b>	22	<b>COLOR TEMPERATURE IN KELVIN</b>	5500
<b>NET LUMINOUS FLUX IN LUMENS</b>	3740	<b>COLOR-RENDERING-INDEX</b>	CRI > 83
<b>LUMEN PER WATT</b>	170	<b>INRUSH CURRENT IN A</b>	0
		<b>LUMEN PER WATT</b>	170
		<b>HOUSING COLOUR</b>	multicoloured
		<b>SWITCH CYCLES</b>	> 100.000
<b>Dimensions</b>		<b>INPUT VOLTAGE SPAN</b>	220-240 V AC
<b>length:</b> 1500mm		<b>WARRANTY IN YEARS</b>	5
<b>diameter:</b> 26mm		<b>INPUT VOLTAGE RANGE LUMINAIRE</b>	220-240 V AC
		<b>ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015</b>	C
		<b>ETIM GRUPPEN-ID</b>	EC001959
		<b>COLOUR CONSISTENCY (MCADAM ELLIPSE)</b>	SDCM6
		<b>PULSE DURATION IN µs</b>	0
		<b>LIGHT COLOUR ACCORDING TO EN 12464-1</b>	daylight white >5300 K
		<b>BEG FUNDING</b>	Only relevant in Germany
		<b>COLOUR</b>	Multi-coloured