


PRODUCT NO. 5321-099140

DOTLUX Mirror light TRENDosocket 10W 3000/4000/5700K COLORselect

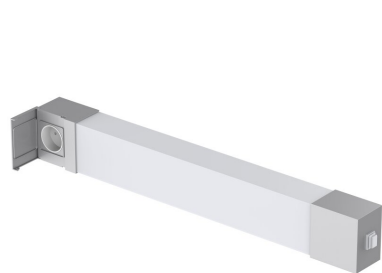

to the product page

- Modern, stylish design with integrated Schuko socket outlet and side switch
- Maximum lighting surface without visible screw connections
- EASYbase platform enables quick and easy installation
- Installation on existing drill holes possible thanks to free surface on the base plate
- 2 cable inlets pre-installed (individual inlets can be drilled into the aluminum base if required)
- Simply set your desired light color yourself, one article number - three light colors through COLORselect
- Sustainable product design thanks to easily replaceable components

WEIGHT IN KG		0.73	BEAM ANGLE		140°
POWER CONSUMPTION IN WATTS		10	PROTECTION CLASS (IP)		IP44
NET LUMINOUS FLUX IN LUMENS		1050	LIGHT COLOR		multicoloured
LUMEN PER WATT		105	INPUT VOLTAGE		220 - 240 V AC
			SERVICE LIFE		approx. 50.000 h at 25°C
			COLOR TEMPERATURE IN KELVIN		3000/4000/5700
			COLOR-RENDERING-INDEX		CRI > 82
			INRUSH CURRENT IN A		0
			IK PROTECTION		IK08
			LUMEN PER WATT		105
			PROTECTION CLASS		I
			HOUSING COLOUR		multicoloured
			SWITCH CYCLES		> 100.000
			INPUT VOLTAGE SPAN		220-240 V AC
			WARRANTY IN YEARS		5
			SIMILAR TO RAL-COLOUR		9006
			INPUT VOLTAGE RANGE LUMINAIRE		220-240 V AC
			ASSORTMENT		Proline
			ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015		not required
			ETIM GRUPPEN-ID		EC002892
			MATERIAL COVER		Plastic matt/satinized
			DIMMING 0-10 V		No
			DIMMING 1-10 V		No
			DIMMING DALI		No
			DIMMING DMX		No

Dimensions

length: 599mm
width: 85mm
height: 57mm

DIMMING DSI	No
DIMMING POTENTIOMETER (INTEGRATED)	No
DIMMING LINESWITCH	No
DIMMING MANUFACTURER'S PROPRIETARY SYSTEM	No
DIMMING MAINS VOLTAGE MODULATION	No
DIMMING PHASE CUT-OFF	No
DIMMING PROGRAMMABLE	No
DIMMING RF	No
DIMMING SINE WAVE REDUCTION	No
DIMMING TOUCH AND DIM	No
DIMMING ZIGBEE	No
DIMMING WITH PUSH-BUTTON	No
DIMMING DEPENDING ON CONTROL GEAR	No
NO DIM FUNCTION	Yes
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
IMPACT STRENGTH	IK08
COLOUR OF LIGHT ADJUSTABLE	Positions
DIMMING DALI-2	No
DIMMING PHASE CUT-ON	No
DIMMING GPRS	No
PULSE DURATION IN µS	0
BEG FUNDING	Only relevant in Germany
ENERGIEEFFIZIENZKLASSE DER LICHTQUELLE EINER LEUCHTE	E