


PRODUCT NO. 5362-040120

DOTLUX LED panel RIMLESS 595x595 max.42W 1050mA 4000K

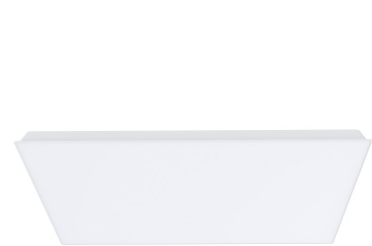

to the product page

- Save even more energy with highly efficient LEDs with a luminous efficacy of 165Lm/W
- Frameless design for large-area illumination (also great for SKYLIGHT motifs)
- Homogeneous luminous surface with frosted cover ensures pleasant light distribution
- Easy to install and service thanks to DC system plug (Plug&Play compatible with all DOTLUX power supplies)

Power consumption with through-wired power supply Art. 5334

45W @1050 mA = 6950Lm
42W @ 950 mA = 6490Lm
30W @ 700 mA = 4930Lm
26W @ 600 mA = 4120Lm

SUCCESSION ARTICLE	-	BEAM ANGLE	120°
WEIGHT IN KG	1.416	PROTECTION CLASS (IP)	IP40
POWER CONSUMPTION IN WATTS	max. 42	LIGHT COLOR	white
NET LUMINOUS FLUX IN LUMENS	max. 6950	SERVICE LIFE	approx. 50.000 h at 25°C
LUMEN PER WATT	max. 178	COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 82
		INRUSH CURRENT IN A	0
		LUMEN PER WATT	max. 178
		PROTECTION CLASS	III
		HOUSING COLOUR	white
		INPUT VOLTAGE SPAN	37-40V DC
		WARRANTY IN YEARS	5
		INPUT VOLTAGE RANGE LUMINAIRE	37-40V DC
		ASSORTMENT	Proline
		ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	not required
		ETIM GRUPPEN-ID	EC002892
		MATERIAL COVER	Plastic matt/satinized
		NO DIM FUNCTION	Yes
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
		PULSE DURATION IN µS	0
		BEG FUNDING	only relevant in Germany
		ENERGIEEFFIZIENZKLASSE DER LICHTQUELLE EINER LEUCHTE	C
		COLOUR OF LIGHT ADJUSTABLE	No

Dimensions

length: 595mm
width: 595mm
height: 30mm