


PRODUCT NO. 3283-040135-B-Ware

**DOTLUX LED street light BELUGAmini 73W 4000K SKI without pole mount B-goods**

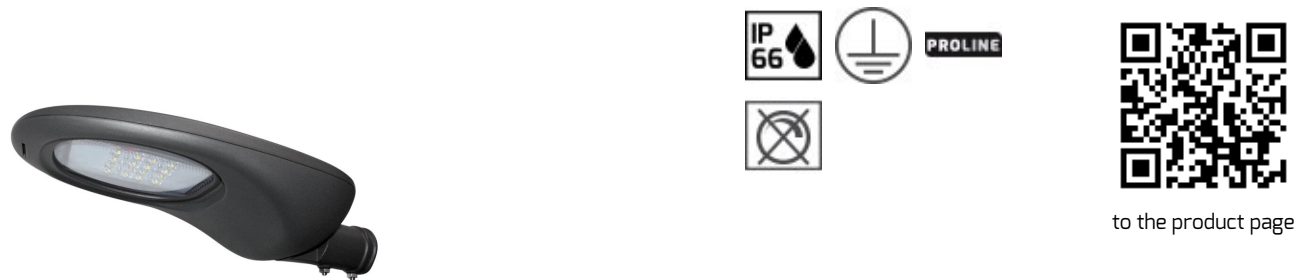

- Protection class I with separate overvoltage protection (10,000 V)
- Variety of adapters enables mounting on all pole diameters
- The multilayer lens optics with CREE® LEDs enable uniform light distribution
- Solid cast aluminum housing in RAL 7022 with impact resistance class IK09 and smooth surface
- Highly efficient PHILIPS® LED driver ensures low maintenance costs
- Future-oriented module design with innovative cooling system
- Easy installation and tool-free maintenance
- Integrated pressure equalization valve

PREDECESSOR ARTICLE	3283 2409 2408-1	BEAM ANGLE	135°/50°
WEIGHT IN KG	5.55	PROTECTION CLASS (IP)	IP66
NET LUMINOUS FLUX IN LUMENS	8760	INPUT VOLTAGE	176 - 240 V AC/DC
POWER CONSUMPTION IN WATTS	max. 73	SERVICE LIFE	approx. 80.000 h at 25°C
LUMEN PER WATT	120	COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 80
		MAST SUPPORT	depending on adapter
		LUMEN PER WATT	120
		PROTECTION CLASS	I
		HOUSING COLOUR	gray
		SWITCH CYCLES	> 160.000
		OVERVOLTAGE PROTECTION	up to 10000 V
		INPUT VOLTAGE SPAN	90-264 V AC
		WARRANTY IN YEARS	0
		INPUT VOLTAGE RANGE LUMINAIRE	90-264 V AC
		ASSORTMENT	Proline
		ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	not required
		ETIM GRUPPEN-ID	EC000062
		DIMMING 0-10 V	No
		DIMMING 1-10 V	No
		DIMMING DALI	No
		DIMMING DMX	No
		DIMMING DSI	No
		DIMMING POTENTIOMETER (INTEGRATED)	No

Dimensions

<b>DIMMING LINESWITCH</b>	No
<b>DIMMING MANUFACTURER'S PROPRIETARY SYSTEM</b>	No
<b>DIMMING MAINS VOLTAGE MODULATION</b>	No
<b>DIMMING PHASE CUT-OFF</b>	No
<b>DIMMING PROGRAMMABLE</b>	No
<b>DIMMING RF</b>	No
<b>DIMMING SINE WAVE REDUCTION</b>	No
<b>DIMMING TOUCH AND DIM</b>	No
<b>DIMMING ZIGBEE</b>	No
<b>DIMMING WITH PUSH-BUTTON</b>	No
<b>NO DIM FUNCTION</b>	Yes
<b>DIMMING PHASE CUT-ON</b>	No
<b>DIMMING GPRS</b>	No