

PRODUCT NO. 5398-25

## DOTLUX LED glass tube NANOTUBE 58,8cm 9W 4000K frosted




to the product page



- Excellent durability due to UV-resistant, non-yellowing glass
- Glass cover allows for better lighting effect
- Easy replacement of fluorescent tubes with starter
- Immediate full, optimum light output after switching on

ONLY AVAILABLE AS A PACKAGE UNIT (25 pieces)!

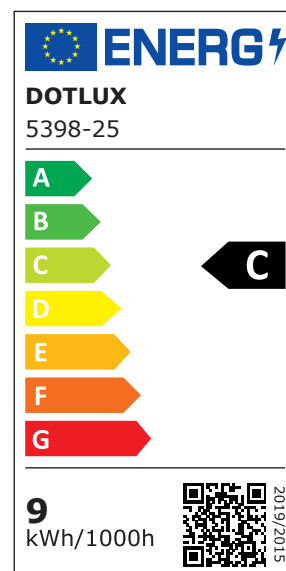

SUCCESSION ARTICLE -  
PREDECESSOR ARTICLE 1615-140180

WEIGHT IN KG 2.5  
NET LUMINOUS FLUX IN LUMENS 1440  
LUMEN PER WATT 160  
POWER CONSUMPTION IN WATTS 9

### Dimensions

diameter: 28mm  
length: 602mm

BEAM ANGLE 220°  
DIMMABLE No  
PROTECTION CLASS (IP) IP20  
INPUT VOLTAGE 220 - 240 V AC  
BASE G13  
COLOR TEMPERATURE IN KELVIN 4000  
COLOR-RENDERING-INDEX CRI > 82  
CONSTRUCTION T8  
POWER FACTOR 0,96  
INRUSH CURRENT IN A 0  
LUMEN PER WATT 160  
HOUSING COLOUR white  
L80/B10 30000  
RATED CURRENT 0.04  
DIMMING WITHOUT DIMMER No  
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015 C  
LIFETIME L80/B10 AT 25°C 30000  
LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C 60000  
ETIM GRUPPEN-ID EC001959  
COLOUR CONSISTENCY (MCADAM ELLIPSE) SDCM6  
PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471 RGO  
COMPATIBLE WITH APPLE HOMEKIT No  
COMPATIBLE WITH GOOGLE ASSISTANT No

<b>COMPATIBLE WITH AMAZON ALEXA</b>	No
<b>IFTTT SUPPORT AVAILABLE</b>	No
<b>LAMP SHAPE</b>	Tube, single-ended
<b>FILAMENT LAMP</b>	No
<b>LAMP DESIGNATION</b>	T8
<b>REMOTE OPERATION POSSIBLE</b>	No
<b>WITH REMOTE CONTROL</b>	No
<b>LIFETIME L70/B50 AT 25°C</b>	60000
<b>LIFETIME L90/B10 AT 25°C</b>	15000
<b>PULSE DURATION IN µs</b>	0
<b>LIGHT COLOUR ACCORDING TO EN 12464-1</b>	neutral white 3300 to 5300 K
<b>LIFETIME L90/B50 AT 25°C</b>	20250
<b>BEG FUNDING</b>	Only relevant in Germany
<b>TYPE OF GLASS/COVER</b>	Opal
<b>COLOUR</b>	White