

PRODUCT NO. 5399-25


DOTLUX LED glass tube NANOTUBE 97cm 12W 4000K frosted



to the product page

- Excellent durability due to UV-resistant, non-yellowing glass
- Glass cover allows for better lighting effect
- Easy replacement of fluorescent tubes with starter
- Immediate full, optimum light output after switching on

ONLY AVAILABLE AS A PACKAGE UNIT (25 pieces)!

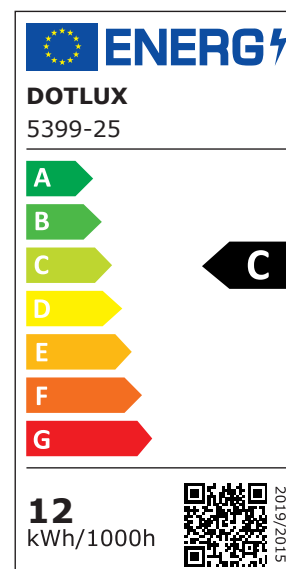

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	2747-240180
WEIGHT IN KG	0.145
LUMEN PER WATT	160
POWER CONSUMPTION IN WATTS	12
NET LUMINOUS FLUX IN LUMENS	1920

Dimensions

length: 982mm
diameter: 28mm

BEAM ANGLE	220°
DIMMABLE	No
PROTECTION CLASS (IP)	IP20
INPUT VOLTAGE	220 - 240 V AC
BASE	G13
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 82
CONSTRUCTION	T8
POWER FACTOR	0,97
INRUSH CURRENT IN A	0
LUMEN PER WATT	160
HOUSING COLOUR	white
L80/B10	30000
RATED CURRENT	0.06
DIMMING WITHOUT DIMMER	No
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	C
LIFETIME L80/B10 AT 25°C	30000
LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	60000
ETIM GRUPPEN-ID	EC001959
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG0
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No

COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
LAMP SHAPE	Tube, single-ended
FILAMENT LAMP	No
LAMP DESIGNATION	T8
REMOTE OPERATION POSSIBLE	No
WITH REMOTE CONTROL	No
LIFETIME L70/B50 AT 25°C	60000
LIFETIME L90/B10 AT 25°C	15000
PULSE DURATION IN µs	0
LIGHT COLOUR ACCORDING TO EN 12464-1	neutral white 3300 to 5300 K
LIFETIME L90/B50 AT 25°C	20250
BEG FUNDING	Only relevant in Germany
TYPE OF GLASS/COVER	Opal
COLOUR	White