

PRODUCT NO. 5401-25


DOTLUX LED glass tube NANOTUBE 120cm 18W 4000K frosted



to the product page

- Excellent durability due to UV-resistant, non-yellowing glass
- Glass cover allows for better lighting effect
- Easy replacement of fluorescent tubes with starter
- Immediate full, optimum light output after switching on

ONLY AVAILABLE AS A PACKAGE UNIT (25 pieces)!

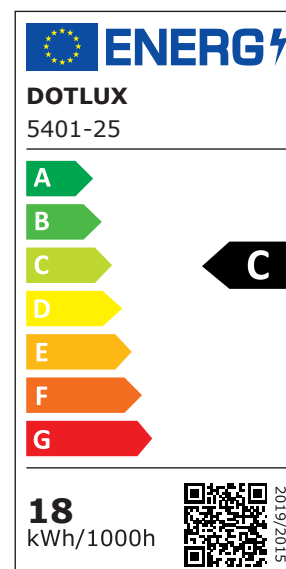

SUCCESSION ARTICLE	-	BEAM ANGLE	220°
PREDECESSOR ARTICLE	1629-240180 3202-1	DIMMABLE	No
WEIGHT IN KG	4.4	PROTECTION CLASS (IP)	IP20
POWER CONSUMPTION IN WATTS	18	INPUT VOLTAGE	220 - 240 V AC
NET LUMINOUS FLUX IN LUMENS	2880	SERVICE LIFE	approx. 30.000 h at 25°C
LUMEN PER WATT	160	BASE	G13
		COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 82
		CONSTRUCTION	T8
		POWER FACTOR	0,96
		INRUSH CURRENT IN A	0
		LUMEN PER WATT	160
		HOUSING COLOUR	white
		L80/B10	30000
		RATED CURRENT	0.09
		DIMMING WITHOUT DIMMER	No
		ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	C
		LIFETIME L80/B10 AT 25°C	30000
		LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	50000
		ETIM GRUPPEN-ID	EC001959
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
		PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG0
		COMPATIBLE WITH APPLE HOMEKIT	No

Dimensions

length: 1212mm
diameter: 28mm

COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
LAMP SHAPE	Tube, single-ended
FILAMENT LAMP	No
LAMP DESIGNATION	T8
REMOTE OPERATION POSSIBLE	No
WITH REMOTE CONTROL	No
LIFETIME L70/B50 AT 25°C	50000
LIFETIME L90/B10 AT 25°C	12500
PULSE DURATION IN µs	0
LIGHT COLOUR ACCORDING TO EN 12464-1	neutral white 3300 to 5300 K
LIFETIME L90/B50 AT 25°C	16667
BEG FUNDING	Only relevant in Germany
TYPE OF GLASS/COVER	Opal
COLOUR	White