

PRODUCT NO. 5402-25


DOTLUX LED glass tube NANOTUBE 150cm 24W 4000K frosted



to the product page

- Excellent durability due to UV-resistant, non-yellowing glass
- Glass cover allows for better lighting effect
- Easy replacement of fluorescent tubes with starter
- Immediate full, optimum light output after switching on

ONLY AVAILABLE AS A PACKAGE UNIT (25 pieces)!

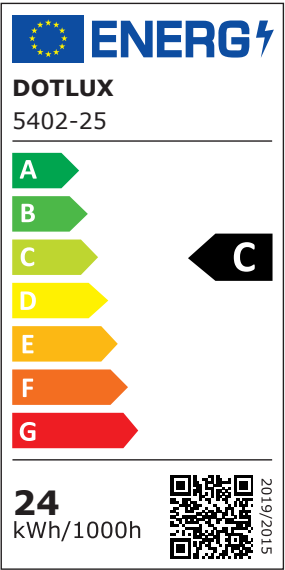

|                             |                    |
|-----------------------------|--------------------|
| SUCCESSION ARTICLE          | -                  |
| PREDECESSOR ARTICLE         | 1937-340180 3201-1 |
| WEIGHT IN KG                | 0.027              |
| NET LUMINOUS FLUX IN LUMENS | 3840               |
| LUMEN PER WATT              | 160                |
| POWER CONSUMPTION IN WATTS  | 24                 |

Dimensions

diameter: 26mm  
length: 1512mm

|  |                |
|--|----------------|
| BEAM ANGLE   | 220°           |
| DIMMABLE   | No             |
| PROTECTION CLASS (IP)  | IP20           |
| INPUT VOLTAGE  | 220 - 240 V AC |
| BASE   | G13            |
| COLOR TEMPERATURE IN KELVIN  | 4000           |
| COLOR-RENDERING-INDEX  | CRI > 82       |
| CONSTRUCTION   | T8             |
| POWER FACTOR   | 0,98           |
| INRUSH CURRENT IN A  | 0              |
| LUMEN PER WATT   | 160            |
| HOUSING COLOUR   | white          |
| L80/B10  | 30000          |
| RATED CURRENT  | 0.11           |
| DIMMING WITHOUT DIMMER   | No             |
| ENERGY EFFICIENCY CLASS<br>ACCORDING TO EU REGULATION<br>2019/2015 | C              |
| LIFETIME L80/B10 AT 25°C   | 30000          |
| LED-LIFETIME LIGHT SOURCE L70/B50<br>AT 25°C                       | 60000          |
| ETIM GRUPPEN-ID  | EC001959       |
| COLOUR CONSISTENCY (MCADAM<br>ELLIPSE)                             | SDCM2          |
| PHOTOBIOLOGICAL SAFETY<br>ACCORDING TO EN 62471                    | RG0            |
| COMPATIBLE WITH APPLE HOMEKIT                                      | No             |
| COMPATIBLE WITH GOOGLE<br>ASSISTANT                                | No             |

|   |                              |
|---|------------------------------|
| <b>COMPATIBLE WITH AMAZON ALEXA</b>         | No                           |
| <b>IFTTT SUPPORT AVAILABLE</b>              | No                           |
| <b>LAMP SHAPE</b>                           | Tube, single-ended           |
| <b>FILAMENT LAMP</b>                        | No                           |
| <b>LAMP DESIGNATION</b>                     | T8                           |
| <b>REMOTE OPERATION POSSIBLE</b>            | No                           |
| <b>WITH REMOTE CONTROL</b>                  | No                           |
| <b>LIFETIME L70/B50 AT 25°C</b>             | 60000                        |
| <b>LIFETIME L90/B10 AT 25°C</b>             | 15000                        |
| <b>PULSE DURATION IN µS</b>                 | 0                            |
| <b>LIGHT COLOUR ACCORDING TO EN 12464-1</b> | neutral white 3300 to 5300 K |
| <b>LIFETIME L90/B50 AT 25°C</b>             | 20250                        |
| <b>BEG FUNDING</b>                          | Only relevant in Germany     |
| <b>TYPE OF GLASS/COVER</b>                  | Opal                         |
| <b>COLOUR</b>                               | White                        |