


PRODUCT NO. 4932-199120

**DOTLUX LED surface-mounted light SURFACEsensor-exit Ø300x62 25W 3000/4000/5700K  
COLORselect white**

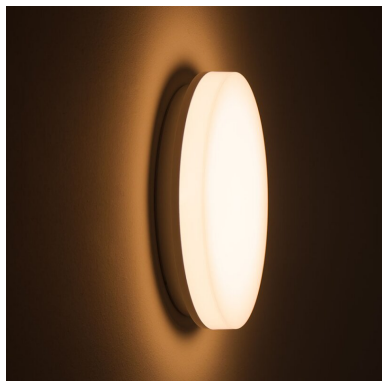

to the product page

- Additional 3h emergency light function with built-in lithium ion battery
- Version with motion (radar) and daylight sensor (several lights can be programmed with one remote control, please order remote control 5713 separately)
- Quick and easy installation with EASYbase base plate and twistlock fastener
- Wide range of products enables use in all projects (e.g. sensor, exit, DALI ...)
- Sustainable product design thanks to easily replaceable LED module, power supply unit and battery
- Rear and side cable entry with large cable storage space enables flexible use on site
- Ideal for residential projects thanks to impact-resistant IK10 polycarbonate housing
- Modern, clear design with indirect light component
- Splash-proof housing for outdoor, wet room and indoor areas
- Individual light color adjustable via COLORselect (light color: 3,000 K / 4,000 K / 5,700 K)

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	4932-0FW120
WEIGHT IN KG	1.246
POWER CONSUMPTION IN WATTS	22
NET LUMINOUS FLUX IN LUMENS	2640/2740/2700
LUMEN PER WATT	120/124/122

**Dimensions**

**diameter:** 300mm  
**height:** 62mm

BEAM ANGLE	120°
PROTECTION CLASS (IP)	IP54
LIGHT COLOR	multicoloured
INPUT VOLTAGE	220 - 240 V AC
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	3000/4000/5700
COLOR-RENDERING-INDEX	CRI > 82
POWER FACTOR	0,9
IK PROTECTION	IK10
BATTERY RUNTIME	3h
LUMEN PER WATT	120/124/122
PROTECTION CLASS	II
VOLTAGE TYPE	AC
HOUSING COLOUR	white
SUITED FOR EMERGENCY LIGHTING	yes
SWITCH CYCLES	> 100.000
WARRANTY IN YEARS	5
L80/B10	50000
ENABLED LICENSED PRODUCT	Yes
POWER EMERGENCY OPERATION IN W	3
ASSORTMENT	Proline
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	not required
LIFETIME L80/B10 AT 25°C	50000
ETIM GRUPPEN-ID	EC002892

<b>MATERIAL COVER</b>	Plastic, structured
<b>DIMMING 0-10 V</b>	No
<b>DIMMING 1-10 V</b>	No
<b>DIMMING DALI</b>	No
<b>DIMMING DMX</b>	No
<b>DIMMING DSI</b>	No
<b>DIMMING POTENTIOMETER (INTEGRATED)</b>	No
<b>DIMMING LINESWITCH</b>	No
<b>DIMMING MANUFACTURER'S PROPRIETARY SYSTEM</b>	No
<b>DIMMING MAINS VOLTAGE MODULATION</b>	No
<b>DIMMING PHASE CUT-OFF</b>	No
<b>DIMMING PROGRAMMABLE</b>	No
<b>DIMMING RF</b>	No
<b>DIMMING SINE WAVE REDUCTION</b>	No
<b>DIMMING TOUCH AND DIM</b>	No
<b>DIMMING ZIGBEE</b>	No
<b>DIMMING WITH PUSH-BUTTON</b>	No
<b>DIMMING DEPENDING ON CONTROL GEAR</b>	No
<b>NO DIM FUNCTION</b>	Yes
<b>IMPACT STRENGTH</b>	IK10
<b>SUITABLE FOR EMERGENCY LIGHTING</b>	Yes
<b>COVERING OF THE LUMINAIRE WITH THERMALLY INSULATING MATERIAL POSSIBLE</b>	No
<b>COLOUR OF LIGHT ADJUSTABLE</b>	Positions
<b>DIMMING DALI-2</b>	No
<b>DIMMING PHASE CUT-ON</b>	No
<b>DIMMING GPRS</b>	No
<b>BEG FUNDING</b>	only relevant in Germany
<b>ENERGIEEFFIZIENZKLASSE DER LICHTQUELLE EINER LEUCHTE</b>	D
<b>BEAM ANGLE</b>	Extreme wide beam >80°