


PRODUCT NO. 5770

LED power supply CC 6W 250mA 24V

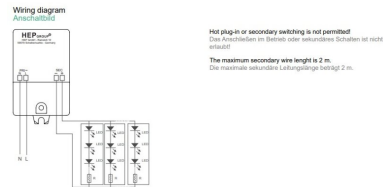

- Direct current output with constant output voltage of 24V
- Suitable for class II luminaires
- Small housing
- Strain reliefs for independent use
- Average service life 50,000 h
- 5 year guarantee
- Short-circuit & open-circuit proof
- Automatic switch-off in case of overtemperature
- Overload protection
- SELV

SUCCESSION ARTICLE	-
WEIGHT IN KG	0.04

Dimensions

length: 65mm
width: 39mm
height: 20mm

PROTECTION CLASS (IP)	IP20
INPUT VOLTAGE	176 - 240 V AC/DC
Service life	
PROTECTION CLASS	II
SUITED FOR EMERGENCY LIGHTING	No
SWITCH CYCLES	> 100.000
OUTPUT VOLTAGE	24
WARRANTY IN YEARS	5
DIMMING WITHOUT DIMMER	No
ETIM GRUPPEN-ID	EC002710
DIMMING 0-10 V	No
DIMMING 1-10 V	No
DIMMING DALI	No
DIMMING DMX	No
DIMMING DSI	No
DIMMING POTENTIOMETER (INTEGRATED)	No
DIMMING LINESWITCH	No
DIMMING MANUFACTURER'S PROPRIETARY SYSTEM	No
DIMMING MAINS VOLTAGE MODULATION	No
DIMMING PHASE CUT-OFF	No
DIMMING PROGRAMMABLE	No
DIMMING RF	No
DIMMING SINE WAVE REDUCTION	No
DIMMING TOUCH AND DIM	No

DIMMING ZIGBEE	No
DIMMING WITH PUSH-BUTTON	No
NO DIM FUNCTION	Yes
SUITABLE FOR EMERGENCY LIGHTING	No
CONSTANT LIGHT OUTPUT (CLO)	No
OPERATION BY BLUETOOTH	No
COMPATIBLE WITH CASAMBI	No
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
SUITABLE FOR CONSTANT VOLTAGE	Yes
SUITABLE FOR OUTDOOR USE	No
SUITABLE FOR DC-VOLTAGE (PRIMARY SIDE)	No
SUITABLE FOR CONSTANT CURRENT	No
HOUSING	Plastic housing
DIMMING PHASE CUT-ON	No
DIMMING GPRS	No
BEG FUNDING	Only relevant in Germany