


PRODUCT NO. 4826-040120-B-Ware

DOTLUX LED panel FLATevo 620x620mm max. 36W UGR<19 4000K B-goods

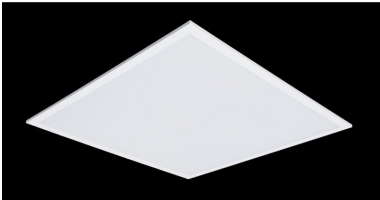

to the product page

- Recessed LED luminaire with CDP Nano microprismatic cover for glare-free light distribution
- UGR<19 suitable for VDU workstations
- Low-current LEDs in conjunction with large-area cooling on the rear guarantee a long LED service life and consequently low maintenance costs
- Easy to install and service thanks to DC system plug (Plug&Play compatible with all DOTLUX power supply units)

Power consumption with different ballasts:

40W @ 1050 mA
36W @ 950 mA
27W @ 700 mA
20W @ 500 mA
14W @ 350 mA

This product is compatible with our mounting frame 5226.

SUCCESION ARTICLE	4826-140120
WEIGHT IN KG	2.116
POWER CONSUMPTION IN WATTS	36
NET LUMINOUS FLUX IN LUMENS	4320
LUMEN PER WATT	120

Dimensions

length: 620mm
width: 620mm
height: 30mm

BEAM ANGLE	90°
PROTECTION CLASS (IP)	IP40
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 82
INRUSH CURRENT IN A	0
IK protection	
LUMEN PER WATT	120
PROTECTION CLASS	III
HOUSING COLOUR	white
GLARE-FREE	UGR < 19
SWITCH CYCLES	> 100.000
WARRANTY IN YEARS	0
ASSORTMENT	Proline
ETIM GRUPPEN-ID	EC002892
DIMMING DEPENDING ON CONTROL GEAR	Yes
IMPACT STRENGTH	IK02
PULSE DURATION IN µS	0
SURFACE PROTECTION HOUSING	Powder coating