


PRODUCT NO. 4779-040120-B-Ware

DOTLUX LED damp-proof luminaire HIGHFORCEabs IP66/IP69 1455mm 54W 4000K IK06 2x5-pole through-wired DALI including end cap

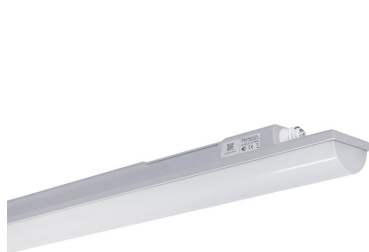

to the product page

- UV-stable diffuser and housing
- Chemical resistant special diffuser made of ChemRST material
- Suitable for agricultural operations
- Housing made of impact-resistant polycarbonate
- IK06 impact resistance
- Suitable for central battery
- IP66 / IP69
- Decertified
- DLG certified
- Distance between both mounting brackets adjustable (700-980mm)
- Mounting brackets allow ceiling and/or wall mounting
- All HIGHFORCE lights are supplied without connector plug. You can find accessories here in the store.

SUCCESSION ARTICLE	4779-140120	BEAM ANGLE	120°
WEIGHT IN KG	1.8	PROTECTION CLASS (IP)	other IP66 / IP69
POWER CONSUMPTION IN WATTS	54	INPUT VOLTAGE	176 - 240 V AC/DC
NET LUMINOUS FLUX IN LUMENS	7170	SERVICE LIFE	approx. 50.000 h at 25°C
LUMEN PER WATT	133	COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 82
		POWER FACTOR	0,95
		INRUSH CURRENT IN A	0
		IK PROTECTION	IK06
		LUMEN PER WATT	133
		PROTECTION CLASS	I
		HOUSING COLOUR	gray
		FOOD-READY	Yes
		WARRANTY IN YEARS	0
		ASSORTMENT	Highline
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
		IMPACT STRENGTH	IK06
		DIMMING DALI-2	Yes
		PULSE DURATION IN µS	0

Dimensions

length: 1455mm
width: 90mm
height: 99mm