

PRODUCT NO. 6207-040170

DOTLUX LED exchangeable module QUICK-FIXplus 34 4W (2 separate connections) 4000K



to the product page


- Universal MAGNET LED module with integrated driver for quick and easy replacement of light sources in existing ceiling and wall luminaires
- Two independent power supply units guarantee flexible adaptation to existing systems
- Extra high magnetic feet enable installation above the existing cabling
- Our QUICK-FIXplus have DIN EN60598-2-22:2014 certification, which confirms approval in the field of emergency lighting
- Very high efficiency of up to 153lm/W thanks to low-current LEDs and therefore long service life
- Special lenses with 170° beam angle ensure absolutely shadow-free light distribution even in larger luminaires up to 900mm
- Both circuits suitable for central battery

Various power specifications:

maximum 38Watt@ 5670 lumen

4Watt circuit = 460 lumen = 115 lm/W

34Watt circuit = 5210 lumen = 153 lm/W

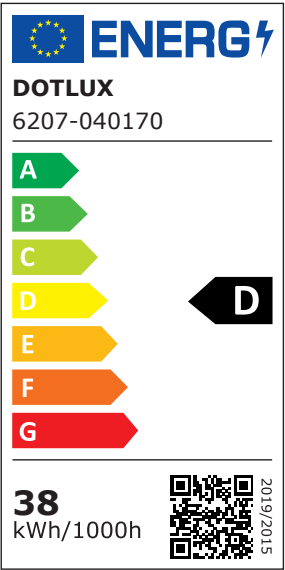

SUCCESSION ARTICLE	-
WEIGHT IN KG	0.506
POWER CONSUMPTION IN WATTS	34+4
NET LUMINOUS FLUX IN LUMENS	5210/460
LUMEN PER WATT	153/115

Dimensions

height: 45mm
diameter: 300mm

BEAM ANGLE	170°
PROTECTION CLASS (IP)	IP20
INPUT VOLTAGE	186 - 240 AC/DC
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	4000
COLOR-RENDERING-INDEX	CRI > 82
POWER FACTOR	0,97
LUMEN PER WATT	153/115
PROTECTION CLASS	II
VOLTAGE TYPE	AC/DC
SWITCH CYCLES	> 100.000
INPUT VOLTAGE SPAN	186-240 V AC/DC
WARRANTY IN YEARS	3
L80/B10	50000
DIMMING WITHOUT DIMMER	No
INPUT VOLTAGE RANGE LUMINAIRE	186-240 V AC/DC
ASSORTMENT	Proline
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	D
MOUNTING LOCATION	Indoor
LIFETIME L80/B10 AT 25°C	50000

LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	100000
LIFETIME L80/B20 AT 25°C	0
ETIM GRUPPEN-ID	EC000996
NO DIM FUNCTION	Yes
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
CONNECTION TYPE	Cable
PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG1
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
FLEXIBLE	Nein
SUITABLE FOR TRAFFIC LIGHTS	No
EXTERNAL DRIVER REQUIRED	No
SUITABLE FOR CONSTANT VOLTAGE	No
SUITABLE FOR GENERAL LIGHTING	Yes
SUITABLE FOR CONSTANT CURRENT	Yes
SUITABLE FOR RAIL TRAFFIC	No
SUITABLE FOR MATRIX INFORMATION BOARDS	No
SUITABLE FOR VARIABLE ROAD SIGNS	No
LIFETIME L70/B50 AT 25°C	100000
LIFETIME L90/B10 AT 25°C	25000
LIGHT COLOUR ACCORDING TO EN 12464-1	neutral white 3300 to 5300 K
LIFETIME L90/B50 AT 25°C	0
BEG FUNDING	Only relevant in Germany
LED-BETRIEBSSTROM IN MA	182
SHAPE	Round
COLOUR	White