



PRODUCT NO. 1808-350120-B-Ware

DOTLUX LED panel FLATugr 620x620mm 40W 5000K UGR<19 frame white (0-10V dimmable power supply unit included) set of 2

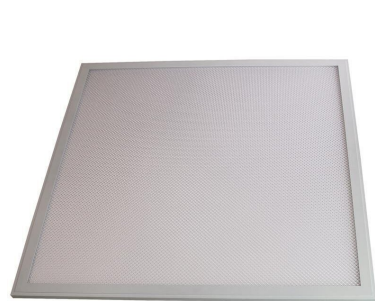

to the product page

Set of 2 consisting of 2x panel and 2x 0-10V dimmable power supply units

Microprism diffuser enables glare-free, homogeneous and shadow-free light distribution
Fatigue-free working thanks to flicker-free light (= UGR < 19 for VDU workstations)
Better contrast rendition with very good color rendering
and constant color temperature (3-step MacAdam binning)
High number of low-current LEDs guarantee a long LED service life
LED service life and consequently low maintenance costs!
White, powder-coated frame & connection cable with plug connector

WEIGHT IN KG	3.3
POWER CONSUMPTION IN WATTS	40
NET LUMINOUS FLUX IN LUMENS	3900

Dimensions

length: 620mm
width: 620mm
height: 10mm

BEAM ANGLE	120°
PROTECTION CLASS (IP)	IP40
INPUT VOLTAGE	220 - 240 V AC
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	5000
COLOR-RENDERING-INDEX	CRI > 83
GLARE-FREE	UGR < 19
SWITCH CYCLES	> 100.000
WARRANTY IN YEARS	0
DIMMING 1-10 V	Yes
DIMMING DALI	Yes
DIMMING DMX	Yes
DIMMING LINESWITCH	Yes
DIMMING MANUFACTURER'S PROPRIETARY SYSTEM	Yes
DIMMING MAINS VOLTAGE MODULATION	Yes
DIMMING PHASE CUT-OFF	Yes
DIMMING PROGRAMMABLE	Yes
DIMMING RF	Yes
DIMMING ZIGBEE	Yes
DIMMING WITH PUSH-BUTTON	Yes
DIMMING DEPENDING ON CONTROL GEAR	Yes
DIMMING DALI-2	Yes
DIMMING PHASE CUT-ON	Yes