


PRODUCT NO. 5363-040120-B-Ware

DOTLUX LED panel RIMLESS 620x620x max.42W 1050mA 4000K

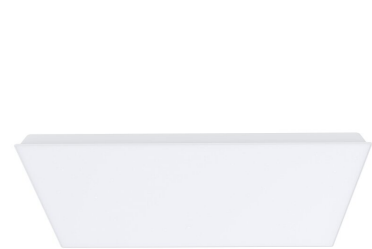

to the product page

- Save even more energy with highly efficient LEDs with a luminous efficacy of 165Lm/W
- Frameless design for large-area illumination (also great for SKYLIGHT motifs)
- Homogeneous luminous surface with frosted cover provides pleasant light distribution
- Easy to install and service thanks to DC system plug (Plug&Play compatible with all DOTLUX power supplies)

Power consumption with through-wired power supply Art. 5334

45W @1050 mA = 6950Lm
42W @ 950 mA = 6490Lm
30W @ 700 mA = 4800Lm
26W @ 600 mA = 4120Lm

This product is compatible with our surface mount frame 5226.

SUCCESSION ARTICLE	-	BEAM ANGLE	120°
WEIGHT IN KG	1.756	PROTECTION CLASS (IP)	IP40
POWER CONSUMPTION IN WATTS	max. 42	LIGHT COLOR	white
NET LUMINOUS FLUX IN LUMENS	max. 6950	SERVICE LIFE	approx. 50.000 h at 25°C
LUMEN PER WATT	max.178	COLOR TEMPERATURE IN KELVIN	4000
		COLOR-RENDERING-INDEX	CRI > 82
		INRUSH CURRENT IN A	0
		LUMEN PER WATT	max.178
		PROTECTION CLASS	III
		INPUT VOLTAGE SPAN	37-40V DC
		WARRANTY IN YEARS	0
		INPUT VOLTAGE RANGE LUMINAIRE	37-40V DC
		ASSORTMENT	Proline
		COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
		PULSE DURATION IN µS	0
		BEG FUNDING	only relevant in Germany
		COLOUR OF LIGHT ADJUSTABLE	No

Dimensions

length: 620mm
width: 620mm
height: 30mm