


PRODUCT NO. 3941-027IP205M

DOTLUX LED strip 24W 8mm 2700K IP20 5m roll incl. 50cm connection cable both sides



to the product page

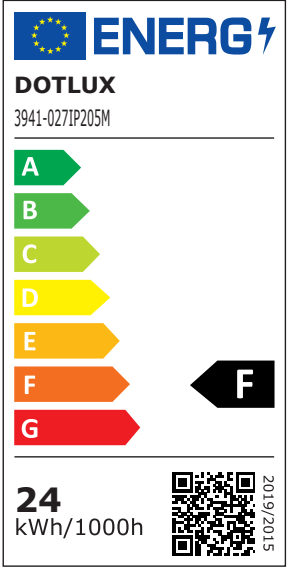

- Cozy and natural light due to extra high color rendering RA>92
- Consistent color temperature due to 3-step Mac Adam binning
- Very densely arranged LEDs enable homogeneous luminous surfaces at smallest distances
- Secure Solder Connect Technology prevents hairline cracks and cold solder joints
- Reinforced conductor tracks ensure uniform brightness
- Original 3M adhesive tape provides strong hold
- 50 cm connection cable pre-mounted on both sides

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	1979-1
WEIGHT IN KG	0.08
POWER CONSUMPTION IN WATTS	24
NET LUMINOUS FLUX IN LUMENS	2000

Dimensions

width: 8mm
length: 5000mm
height: 2mm

BEAM ANGLE	120°
PROTECTION CLASS (IP)	IP20
LIGHT COLOR	white
SERVICE LIFE	approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	2700
COLOR-RENDERING-INDEX	CRI > 92
AMOUNT OF LED/M	70
SEVERABLE BY MM	100
TC TEMPERATURE IN °C	67
OUTPUT W/M	4,8
LIGHT FLUX LM/M	400
SMALLEST BEND RADIUS IN MM	25
SWITCH CYCLES	> 100.000
INPUT VOLTAGE SPAN	24 V DC
WARRANTY IN YEARS	7
INPUT VOLTAGE RANGE LUMINAIRE	24 V DC
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	F
ETIM GRUPPEN-ID	EC002706
BEG FUNDING	Only relevant in Germany
ENERGIEEFFIZIENZKLASSE DER LICHTQUELLE EINER LEUCHTE	-
COLOUR OF LIGHT ADJUSTABLE	No