



PRODUCT NO. 2805-030120

DOTLUX QUICK-FIX LED exchangeable module Ø15cm 15W 3000K

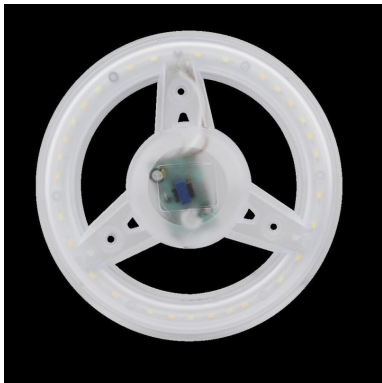

to the product page

- Universal MAGNET LED module with integrated driver for quick and easy replacement of light sources in existing ceiling and wall luminaires
- Extra high magnetic feet enable installation above the existing cabling
- Very high efficiency of up to 120lm/W

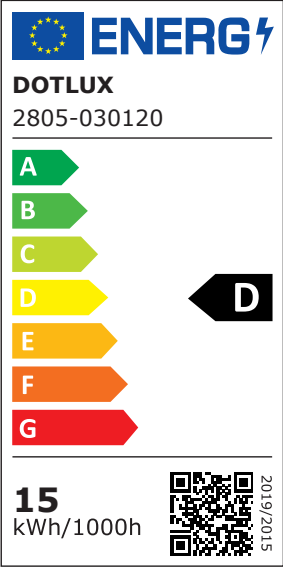

SUCCESSION ARTICLE	-
PREDECESSOR ARTICLE	2805
WEIGHT IN KG	0.11
POWER CONSUMPTION IN WATTS	15
NET LUMINOUS FLUX IN LUMENS	1800
LUMEN PER WATT	120

Dimensions

diameter: 150mm
height: 32mm

BEAM ANGLE	120°
PROTECTION CLASS (IP)	IP20
INPUT VOLTAGE	220 - 240 V AC
SERVICE LIFE	approx. 20.000 h at 25°C
COLOR TEMPERATURE IN KELVIN	3000
COLOR-RENDERING-INDEX	CRI > 82
POWER FACTOR	0,57
LUMEN PER WATT	120
PROTECTION CLASS	II
VOLTAGE TYPE	AC/DC
SWITCH CYCLES	> 40.000
INPUT VOLTAGE SPAN	185-264 V AC
WARRANTY IN YEARS	2
L80/B10	10000
DIMMING WITHOUT DIMMER	No
INPUT VOLTAGE RANGE LUMINAIRE	185-264 V AC
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015	D
LIFETIME L80/B10 AT 25°C	10000
LED-LIFETIME LIGHT SOURCE L70/B50 AT 25°C	20000
LIFETIME L80/B20 AT 25°C	0
ETIM GRUPPEN-ID	EC000996
NO DIM FUNCTION	Yes
COLOUR CONSISTENCY (MCADAM ELLIPSE)	SDCM6
CONNECTION TYPE	Cable

PHOTOBIOLOGICAL SAFETY ACCORDING TO EN 62471	RG1
COMPATIBLE WITH APPLE HOMEKIT	No
COMPATIBLE WITH GOOGLE ASSISTANT	No
COMPATIBLE WITH AMAZON ALEXA	No
IFTTT SUPPORT AVAILABLE	No
FLEXIBLE	Nein
SUITABLE FOR TRAFFIC LIGHTS	No
EXTERNAL DRIVER REQUIRED	No
SUITABLE FOR CONSTANT VOLTAGE	No
SUITABLE FOR GENERAL LIGHTING	Yes
SUITABLE FOR CONSTANT CURRENT	Yes
SUITABLE FOR RAIL TRAFFIC	No
SUITABLE FOR MATRIX INFORMATION BOARDS	No
SUITABLE FOR VARIABLE ROAD SIGNS	No
LIFETIME L70/B50 AT 25°C	20000
LIFETIME L90/B10 AT 25°C	5000
LIGHT COLOUR ACCORDING TO EN 12464-1	warm white <3300 K
LIFETIME L90/B50 AT 25°C	7000
BEG FUNDING	Only relevant in Germany
LED-BETRIEBSSTROM IN MA	150
SHAPE	Round
COLOUR	White