

PRODUCT NO. 2746-140180

DOTLUX LED tube LUMENPLUS 104,7cm 15W 4000K frosted rotatable end cap special size



PROLINE




to the product page

• TECHNICAL ADVANTAGES

- Internal aluminum heat sink enables optimized thermal management
- Polycarbonate cover with UV-protective coating (non-yellowing)
- Future-oriented due to individually replaceable power supply units
- Individually adjustable light beam angle due to patented end cap
- Fail-safe, as each individual LED is controlled separately

• FURTHER ADVANTAGES OF THE LUMENPLUS TUBES

- 5 years Dotlux warranty on drivers and LEDs
- Very easy replacement of fluorescent tubes with starter
- Immediately the full, optimal light output after switching on
- LM80 certified LEDs

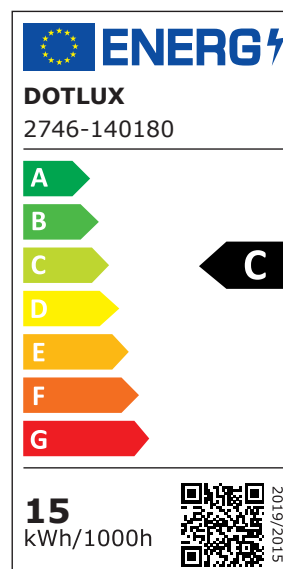

SUCCESSION ARTICLE 2746-240180
PREDECESSOR ARTICLE 2746-040180

WEIGHT IN KG 0.24
POWER CONSUMPTION IN WATTS 15
NET LUMINOUS FLUX IN LUMENS 2550
LUMEN PER WATT 170

Dimensions

length: 1047mm

diameter: 28mm

BEAM ANGLE 180°
PROTECTION CLASS (IP) IP20
INPUT VOLTAGE 220 - 240 V AC
SERVICE LIFE approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN 4000
COLOR-RENDERING-INDEX CRI > 83
INRUSH CURRENT IN A 0
LUMEN PER WATT 170
HOUSING COLOUR multicoloured
SWITCH CYCLES > 100.000
WARRANTY IN YEARS 5
ASSORTMENT Proline
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION 2019/2015 C
ETIM GRUPPEN-ID EC001959
COLOUR CONSISTENCY (MCADAM ELLIPSE) SDCM6
PULSE DURATION IN µS 0
LIGHT COLOUR ACCORDING TO EN 12464-1 neutral white 3300 to 5300 K
BEG FUNDING Only relevant in Germany
COLOUR White