DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 2822-640180

4 260523 595414

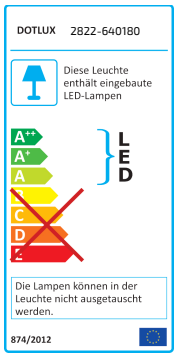

Dimension lenght in mm: 1560
Dimension width in mm: 85
Dimension height in mm: 87
Energy consumption in W: 32
: 3700
Energy consumption kWh/1000h: 32

Beam angle: 180°
Color temperature in Kelvin: 4000
Color-rendering-index: CRI > 82
Colour of cover: frosted
Cover material: polycarbonate
Dimmable: not dimmable
ENABLED licensed product: Yes
Energy efficiency: A+
Fire protection: yes
Food-Ready: yes
Frequency range in Hz: 50/60
Housing colour: gray
Housing material: Polycarbonate
IK protection: IK08
IP- Protecion: IP65
L/B value: L80/B10
Lifetime: approx. 50.000 h at 25°C
light color: neutral white
Motion sensor: radar, corridor-plus-function
Power- factor: 0,92
Power supply: integrated
Protection class: I
Replaces illuminants up to: 1x 58 W fluorescent tube
Suitable for through-wiring: Yes
Suited for emergency power: yes
Switch cycles: > 100.000
Tc temperature in °C: 50
Temperature range: -40°C to +40°C
Voltage type: AC
Warranty: 5 years
Weight: 2.00 kg