DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 3304-0FW120

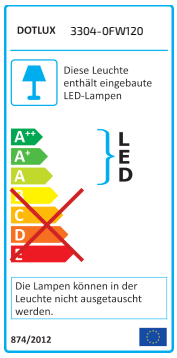

4 260523 599405

Dimension lenght in mm: 1200
Dimension width in mm: 300
Dimension height in mm: 23
Energy consumption in W: 54
: B16=8, C16=13
Net luminous flux in lumen: 5670
Lumens per watt: 105
Energy consumption kWh/1000h: 54

Beam angle: 120°
Color temperature in Kelvin: 3000/4000/5500
Color-rendering-index: CRI > 82
Cord length: 140 cm
Dimmable: Step dimming
Dimmable: 1-10 V
ENABLED licensed product: Yes
Energy efficiency: A+
Frequency range in Hz: 50/60
Glare-free: UGR < 19
Housing colour: white
Input via battery: central (central-battery)
Input voltage: 220-240 V AC
IP-Protecion: IP40
L/B value: L70/B10
Lifetime: approx. 50.000 h at 25°C
Light color: neutral white
Light source: SAMSUNG® G2 LED
Material: Aluminium
Overvoltage protection: up to 4000 V
Power supply: Integrated
Protection class: II
Rope length: 150cm
Special feature: Flicker-free
Special feature: connection cable included
Suited for emergency lighting: yes
Switch cycles: > 100.000
Temperature range: -20°C to +50°C
Voltage type: AC

DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 3304-0FW120

4 260523 599405

Warranty: 7 years
Weight: 3.35 kg