DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 4193-03050120FB

4 260523 594943

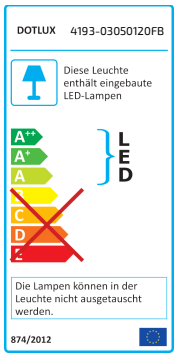

Dimension height in mm: 165
Diameter in mm: 380
Energy consumption in W: max.135W bei 5000K, (max.35W bei 3000K)
: 20000 bei 5000K (4600 bei 3000K)
: 148 (131 bei 3000K)
Energy consumption kWh/1000h: 170

Ballproof: yes
Beam angle: 120°
Color temperature in Kelvin: 3000/5000
Color-rendering-index: CRI > 85
Colour of cover: frosted
Cord length: 3x 100 cm
Cover material: polycarbonate
Dimmable: DALI
ENABLED licensed product: Yes
Energy efficiency: A++
Fire protection: yes
Food-Ready: yes
Frequency range in Hz: 50/60
Housing material: Aluminium
Input voltage: 110-240 V AC / 176-276 V DC
IP- Protecion: IP40
Lifetime: approx. 80.000 h at 60°C
light color: daylight white
Power supply: Meanwell®
Protection class: I
Replaces illuminants up to: 400 W (HQL)
Stand by losses: < 0,5 W
Switch cycles: > 160.000
Temperature range: -40°C to +60°C
Warranty: 7 years
Weight: 5.70 kg