DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 4866-050015

4 260629 144561

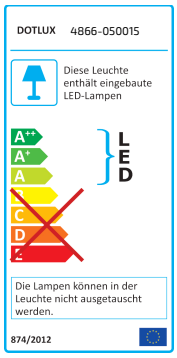

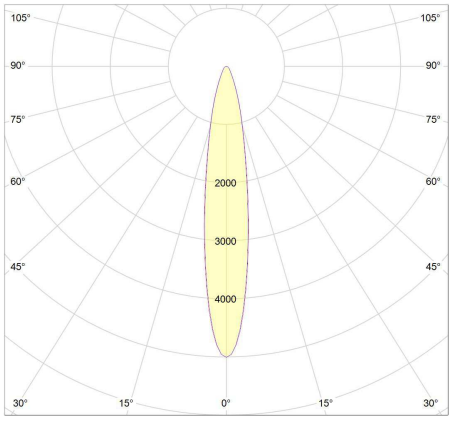

Dimension lenght in mm: 375
Dimension width in mm: 320
Dimension height in mm: 75
Energy consumption in W: 150
: B16=6, C16=10
Net luminous flux in lumen: 18700
Lumens per watt: 125
Energy consumption kWh/1000h: 150

Beam angle: 15°
Color temperature in Kelvin: 5000
Color-rendering-index: CRI > 82
Colour of cover: clear
Dimmable: not dimmable
Effective projected area in m²: 0,104
Energy efficiency: A++
Frequency range in Hz: 50/60
Housing colour: black
Housing material: Aluminium
IK protection: IK08
Input voltage: 220-240 V AC
IP-Protecion: IP66
L/B value: L80/B10
Lifetime: approx. 50.000 h at 25°C
Light color: daylight white
Overvoltage protection: up to 10000 V
Power supply: Internal
Protection class: I
Switch cycles: > 100.000
Temperature range: -30°C to +50°C
Warranty: 7 years
Weight: 4.50 kg