DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 5079-04020M

4 260629 148262

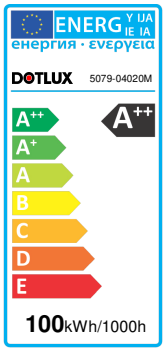

Dimension lenght in mm: 20000
Dimension width in mm: 10
Dimension height in mm: 1
: ja
: 3,4
: eckig
Energy consumption in W: 100
Net luminous flux in lumen: 15800
Energy consumption kWh/1000h: 100

Amount of LED/m: 112
Beam angle: 120°
Color temperature in Kelvin: 4000
Color-rendering-index: CRI > 82
Colour channels: MONO
Cord length: 50 cm
Energy efficiency: A++
Input voltage: 24 V DC
IP-Protecion: IP20
L/B value: L80/B10
Lifetime: approx. 50.000 h at 25°C
Light color: neutral white
Light source: SMD 2835 LED
Output lm/W: 160
Output W/m: 5
Self-sticking: Yes, double-sided 3M sticky tape
Severable by mm: 62,5
Severable by mm: 50
Smallest bend radius in mm: 50
Switch cycles: > 100.000
Tc temperature in °C: 67
Temperature range: -20°C to +60°C
Warranty: 7 years
Weight: 0.65 kg