DOTLUX
LICHT IN BESTER QUALITÄT
Richard-Stücklen-Straße 7 | D-91781 Weißenburg
phone +49 (0) 9141 - 4051 - 0 | fax +49 (0) 9141 - 4051 - 999
mail: info@dotlux.de

Datasheet for article

ArtNr.: 5096-040120

4 260629 148774

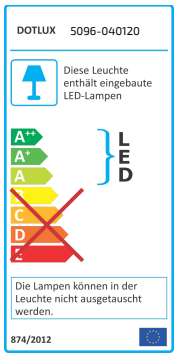

Dimension height in mm: 26
Diameter in mm: 98
Energy consumption in W: 4
Net luminous flux in lumen: 240
Lumens per watt: 60
Energy consumption kWh/1000h: 4

Beam angle: 120°
Color temperature in Kelvin: 4000
Color-rendering-index: CRI > 82
Colour of cover: frosted
Cord length: 14 cm
Dimmable: not dimmable
ENABLED licensed product: Yes
Energy efficiency: A+
Frequency range in Hz: 50/60
Housing colour: white
Housing material: Polypropylene
Input voltage: 220-240 V AC
Installation opening diameter in mm: 77-82
IP-Protecion: IP20
L/B value: L70/B10
LED operating power in mA: 350
LED operating power in mA: 100
Lifetime: approx. 30.000 h at 25°C
Light color: neutral white
Light source: SMD 2835 LED
Power Factor: 0,6
Power supply: Integrated
Protection class: II
Switch cycles: > 60.000
Temperature range: -20°C to +45°C
Warranty: 2 years