


PRODUCT NO. 5363-040120-B-Ware

DOTLUX LED panel RIMLESS 620x620x max.42W 1050mA 4000K

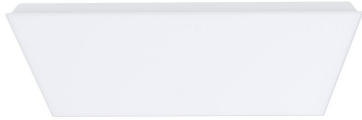

to the product page

- Save even more energy with highly efficient LEDs with a luminous efficacy of 165Lm/W
- Frameless design for large-area illumination (also great for SKYLIGHT motifs)
- Homogeneous luminous surface with frosted cover provides pleasant light distribution
- Easy to install and service thanks to DC system plug (Plug&Play compatible with all DOTLUX power supplies)

Power consumption with through-wired power supply Art. 5334

45W @1050 mA = 6950Lm
 42W @ 950 mA = 6490Lm
 30W @ 700 mA = 4800Lm
 26W @ 600 mA = 4120Lm

This product is compatible with our surface mount frame 5226.

PRODUCT GROUP EC002892_Decken-/Wandleuchte

WEIGHT IN KG 1.756
POWER CONSUMPTION IN WATTS max. 42
NET LUMINOUS FLUX IN LUMENS max. 6950
LUMEN PER WATT max.178

BEAM ANGLE 120
PROTECTION CLASS (IP) IP40
LIGHT COLOR white
SERVICE LIFE approx. 50.000 h at 25°C
COLOR TEMPERATURE IN KELVIN 4000
COLOR-RENDERING-INDEX CRI > 82
INRUSH CURRENT IN A 0
LUMEN PER WATT max.178
PROTECTION CLASS III
INPUT VOLTAGE SPAN 37-40
WARRANTY IN YEARS 0
INPUT VOLTAGE RANGE LUMINAIRE 37-40
ASSORTMENT Proline
SUITABLE FOR WORKPLACE ACCORDING TO EN 12464-1 No
COLOUR CONSISTENCY (MCADAM ELLIPSE) SDCM6
EXCHANGEABLE CONTROL GEAR Yes
LAMP TYPE LED not exchangeable
PULSE DURATION IN µS 0
BEG FUNDING only relevant in Germany
DIAMETER IN MM 0
ABMESSUNGEN BREITE MM 620
ABMESSUNGEN HÖHE MM 30

Dimensions

length: 620mm
width: 620mm
height: 30mm

COLOUR OF LIGHT ADJUSTABLE

No