


PRODUCT NO. 6686

**DOTLUX Emergency lighting insert for DALI-2 control unit**

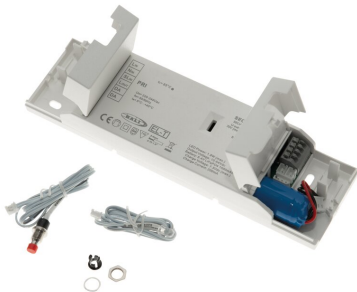

to the product page

- Emergency lighting LED driver with DALI-2 interface and automatic test function
- for self-contained emergency lighting
- for LED modules with a forward voltage of 10-54V
- SELV
- Constant output power 1.8 W
- 3h rated operating time / LiFePo4 battery
- Average service life 50,000 h

**PRODUCT GROUP** EC002710\_LED-Betriebsgerät

**SUCCESSION ARTICLE** -

**WEIGHT IN KG** 0.26

**Dimensions**

**length:** 199mm  
**width:** 55mm  
**height:** 24mm

<b>PROTECTION CLASS (IP)</b>	IP20
<b>INPUT VOLTAGE</b>	220 - 240 AC
Inrush current in A	
<b>BATTERY RUNTIME</b>	3h
<b>PROTECTION CLASS</b>	II
<b>SUITED FOR EMERGENCY LIGHTING</b>	yes
Output voltage	
<b>WARRANTY IN YEARS</b>	5
<b>DIMMING WITHOUT DIMMER</b>	No
<b>DIMMING 0-10 V</b>	No
<b>DIMMING 1-10 V</b>	No
<b>DIMMING DALI</b>	Yes
<b>DIMMING DMX</b>	No
<b>DIMMING DSI</b>	No
<b>DIMMING POTENTIOMETER (INTEGRATED)</b>	No
<b>DIMMING LINESWITCH</b>	No
<b>DIMMING MANUFACTURER'S PROPRIETARY SYSTEM</b>	No
<b>DIMMING MAINS VOLTAGE MODULATION</b>	No
<b>DIMMING PHASE CUT-OFF</b>	No
<b>DIMMING PROGRAMMABLE</b>	Yes
<b>DIMMING RF</b>	No
<b>DIMMING SINE WAVE REDUCTION</b>	No
<b>DIMMING TOUCH AND DIM</b>	No

<b>DIMMING ZIGBEE</b>	No
<b>DIMMING WITH PUSH-BUTTON</b>	No
<b>NO DIM FUNCTION</b>	No
<b>SUITABLE FOR EMERGENCY LIGHTING</b>	Yes
<b>CONSTANT LIGHT OUTPUT (CLO)</b>	No
<b>OPERATION BY BLUETOOTH</b>	No
<b>COMPATIBLE WITH CASAMBI</b>	No
<b>COMPATIBLE WITH APPLE HOMEKIT</b>	No
<b>COMPATIBLE WITH GOOGLE ASSISTANT</b>	No
<b>COMPATIBLE WITH AMAZON ALEXA</b>	No
<b>IFTTT SUPPORT AVAILABLE</b>	No
<b>MODEL</b>	Static
<b>SUITABLE FOR CONSTANT VOLTAGE</b>	No
<b>SUITABLE FOR OUTDOOR USE</b>	No
<b>SUITABLE FOR DC-VOLTAGE (PRIMARY SIDE)</b>	No
<b>SUITABLE FOR CONSTANT CURRENT</b>	No
<b>HOUSING</b>	Plastic housing
<b>DIMMING PHASE CUT-ON</b>	No
<b>DIMMING GPRS</b>	No
<b>BEG FUNDING</b>	Only relevant in Germany
<b>ELDAS-NR.</b>	927265919
<b>RATED AMBIENT TEMPERATURE ACCORDING TO IEC62722-2-1 IN °C</b>	0-45
<b>ABMESSUNGEN BREITE MM</b>	55
<b>ABMESSUNGEN HÖHE MM</b>	24
<b>MAX. NUMBER OF LIGHTS PER MINIATURE CIRCUIT BREAKER B16</b>	48
<b>MAX. NUMBER OF LIGHTS PER CIRCUIT BREAKER C16</b>	48